


Cost Effective High Speed PTZ Cameras



Dimensions

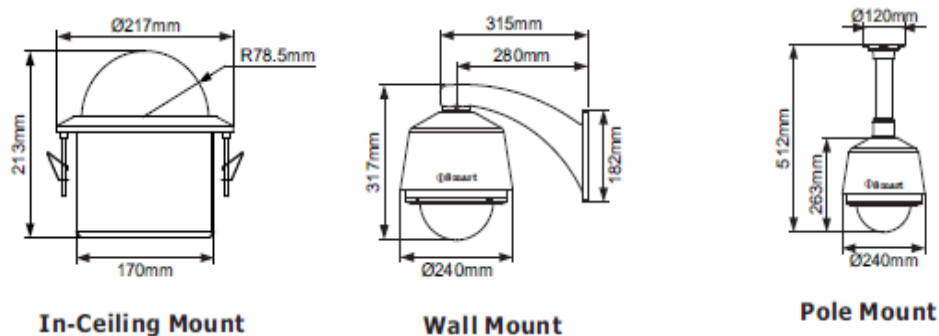

Features

- ※ 18x optical zoom;
- ※ 360° horizontal rotation at maximum preset speed of 250°/sec;
- ※ Vertical rotation of 90° with maximum preset speed 250°/sec;
- ※ 256 preset positions;
- ※ Built-in OSD Menu, to change dome parameter, save or call preset, and achieve auto scan, pattern etc;
- ※ Features password protection to prevent unauthorized changes to the dome setting;
- ※ Easy Installation;
- ※ The feature of defining specific activity when the dome parks;
- ※ Integrated design with high reliability;
- ※ RS-485 data communication;
- ※ Auto Flip to follow object and surveillance of any subject that is constant and continuous;
- ※ The speed can be adjusted automatically according to zooming times;
- ※ Auto focus can be adjusted automatically according to zooming times;
- ※ Auto focus lens and auto white balance, BLC function;
- ※ Multi-protocol compatible(Pelco D, Pelco P, etc).

Specification

Model	WS-HS1805
Camera	
Image Sensor	1/3" SONY Exview HAD CCD II
Effective Pixels	PAL:960(H) x 582(V)/NTSC:967(H) x 494(V)
Resolution	650TVL
Sync. System	Internal
Video Output	CVBS(1Vp-p75Ω)
Min.Illumination	0.01Lux
WB	Auto / Indoor / Outdoor / Manual
Focal	Auto / Manual
Exposure Control	Auto / Manual
S/N Ratio	≥48dB
BLC	Yes
WDR	D-WDR
DNR	2D/OFF
Day/Night Mode	Color/B/W/Auto
Lens	
Optical Zoom	18X
Focal	f=5mm-9.0mm
IRIS Control	F1.6-F3.0
Field of View	H:52.5°(w) - 3.0°(T); V: 40.0°(W) - 2.3°(T)
PTZ	
Pan Range	360° continuous
Pan Speed	0.05°/s~400°/s
Tilt Range	-5° ~ +90°(Auto Flip)
Tilt Speed	0.03°~300°/s
Preset Number	256
PTZ Precision	+/- 0.005°
Auto Cruise	Auto switch from 1 to 30 preset positions sequentially
Pattern Scan	4 Routes
General	
OSE	English
Control Interface	RS-485
Address	0-255
Protocol	Pelco-P/Pelco-D
Baud Rate	1200/2400/4800/9600/19200bps
Power Supply	12V DC/ 24V DC/24V AC
Power Consumption	20W
Working Temperature	-25°C - 70°C
IP Index	IP66, TVS, Anti-surge
Size	Wall: 400mm x 240mm x 317mm In-Ceiling: 217mm x 213mm Pole:240mm x 512mm
Weight	Wall:4.4KG In-Ceiling:2KG Pole:3.9KG

Product specification are subject to change without notice

www.winsafecctv.com