



Features

- ※ Latest CMOS sensor, support up to 1080P30 video outputs
- ※ 10X optical zoom, up to 99 degree FOV
- ※ MJPEG/H.264 compression, standard UVC protocol
- ※ Tracking performance fits different size of shape of conference room
- ※ 1 audio input, 1 audio output
- ※ Power consumption is less than 5W
- ※ HDMI & USB video output interfaces
- ※ Advanced 2D/3D, great noise control performance
- ※ Controllable via USB interface or remote controller
- ※ Smooth and stable movement, precise positioning
- ※ Special cable entry design, easy for installation

Dimensional Drawing

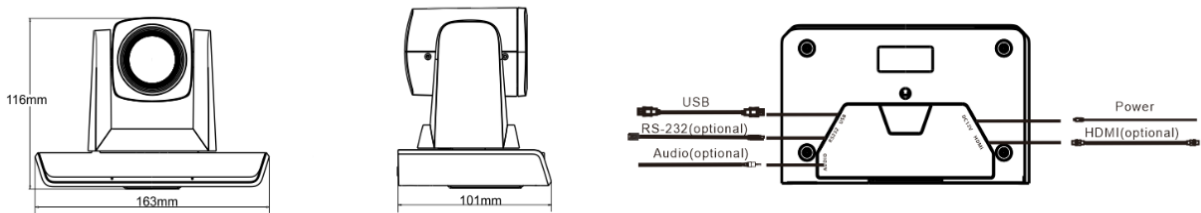

Accessories



Wall Bracket

Technical Specification

Model No.

AMC-M1001V2

Camera	
Image Sensor	1/2.8" CMOS, 2.16MP
Resolution	Max 1080p/30fps
Focal	f=5.15mm - 47.38mm
IRIS	F2.38
Optical Zoom	10X
Field of View	62.6° - 7.08°
Focus	Auto , Manual, PTZ Trigger, One Push
Min.illumination	0.5Lux(Color), 0.1Lux(B/W)
Shutter Speed	1/1 - 1/10,000s
AGC	Auto/Manual
White Balance	Auto, One Push, Manual, Auto Track
DNR	2D/3D
BLC	Yes
S/N Ratio	Above 50dB
Pan & Tilt	
Pan Range	-90° - +90°
Tilt Range	-30° - +90°
Pan Speed	30°/s
Tilt Speed	20°/s
Preset Number	32
Interface	
Control	RS-232
Video	1 X HDMI
Audio	One line in, One Line out
USB	USB2.0, compatible with UVC1.0-1.5
IR Remote	Yes
General	
Power Consumption	Below 5W
Power Supply	DC12V
Working Temp	0°C - +40°C
Storage Temp	-20°C - +60°C
Dimension	163mm x 101mm x 116+mm
Weight	0.6kg
Color	Black
*** Product specification are subject to change without notice ***	